


Cavo multipolare in gomma H07RN-F Rubber multicore cable H07RN-F



SCHEMATIC DRAWINGS

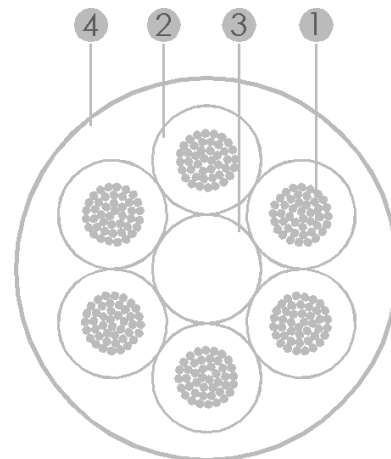

APPLICAZIONI APPLICATIONS

Idonei per installazioni in officine industriali ed agricole, cantieri e costruzione, per applicazioni in servizio pesante, per l'alimentazione di macchine industriali ed agricole ed apparecchi nei quali i cavi sono sottoposti a sollecitazioni meccaniche medie (piastre riscaldanti, utensili elettrici quali trapani, seghe circolari ed utensili elettrici domestici) ed installazioni fisse su facciate di edifici provvisori. E' ammesso l'utilizzo permanente esterno ed in presenza d'acqua [condizione AD6].

Suitable for use in industrial and agricultural workshops, building sites, for heavy duty applications, supplying industrial and agricultural machines and appliances that could be undergone to medium mechanical stresses (heating plates, electric tools such as drills, circular saws and domestic devices) and fixed installations on rough-cast in temporary buildings. The permanent outdoor use and in places with presence of water (AD6 condition) is allowed.

COSTRUZIONE

CABLE STRUCTURE

1. Conduttore flessibile in rame elettrolitico rosso
Electrolytic bare copper flexible conductor
2. Isolamento in gomma elastomerica EI4
EI4 elastomeric rubber insulation
3. Riempitivo centrale in cotone filato (solo per configurazione a 5 conduttori)
Yarn cotton central filler (only for 5-core construction)
4. Guaina in gomma elastomerica EM2 o elastomero sintetico equivalente
EM2 elastomeric rubber or equivalent synthetic elastomer outer sheath

Temperatura utilizzo
Temperature range



- 25 ÷ 60 °C
(@ fixed installation)

Tensione di esercizio
Voltage rating



450/750 V_{AC}

Tensione di prova
Test voltage



2500 V_{AC}

Temperatura di corto circuito
Short-circuit temperature



200 °C

Resistenza alla fiamma
Flame resistance



IEC 60332-1-2
CPR class Eca

Idoneo per uso esterno
Suitable for outdoor use



Idoneo per posa mobile
Suitable for mobile installation



Raggio di curvatura
Bending radius



≥ 6 x D
(@ fixed installation)

Resistenza agli oli
Oil resistance



EN 50363-2-1

Basso contenuto di PAH
Low PAH content



© All rights reserved.

All contents of this document are our property and any copy or divulgation is not allowed without our written authorization

Sezione Size conductor [mm ²]	Formazione conduttore Conductor stranding [N° x mm]	Resistenza elettrica Electrical resistance [Ω/Km]	Diametro su isolamento Diameter on insulation [mm]	Spessore di isolamento Radial thickness of insulation [mm]
1	32 x 0.193	≤ 19.5	2.85 ± 0.1	≥ 0.80
1.5	28 x 0.243	≤ 13.3	3.05 ± 0.1	≥ 0.80
2.5	48 x 0.243	≤ 7.98	3.8 ± 0.1	≥ 0.90
4	52 x 0.300	≤ 4.95	4.5 ± 0.1	≥ 1.0
6	80 x 0.300	≤ 3.30	5.25 ± 0.1	≥ 1.0

Sezione Size conductor [mm ²]	Diametro esterno Outer diameter [mm]	Spessore guaina Thickness of jacket [mm]
2 x 1	8.0 ± 0.2	≥ 1.3
3 x 1	8.8 ± 0.2	≥ 1.4
4 x 1	9.7 ± 0.2	≥ 1.5
5 x 1	10.6 ± 0.3	≥ 1.6
2 x 1.5	9.0 ± 0.2	≥ 1.5
3 x 1.5	9.6 ± 0.2	≥ 1.6
4 x 1.5	10.5 ± 0.3	≥ 1.7
5 x 1.5	11.5 ± 0.3	≥ 1.8
2 x 2.5	10.7 ± 0.3	≥ 1.7
3 x 2.5	11.6 ± 0.3	≥ 1.8
4 x 2.5	12.6 ± 0.4	≥ 1.9
5 x 2.5	13.9 ± 0.4	≥ 2.0

Sezione Size conductor [mm ²]	Diametro esterno Outer diameter [mm]	Spessore guaina Thickness of jacket [mm]
2 x 4	12.3 ± 0.4	≥ 1.8
3 x 4	13.2 ± 0.4	≥ 1.9
4 x 4	14.4 ± 0.4	≥ 2.0
5 x 4	16.1 ± 0.4	≥ 2.2
2 x 6	14.1 ± 0.4	≥ 2.0
3 x 6	15.2 ± 0.4	≥ 2.1
4 x 6	16.5 ± 0.4	≥ 2.3
5 x 6	18.5 ± 0.4	≥ 2.5

© All rights reserved.

All contents of this document are our property and any copy or divulgation is not allowed without our written authorization

Riferimento normativo <i>Standard reference</i>	EN 50525-2-21, Direttiva Europea Bassa Tensione No. 2014/35/UE, Regolamento Europeo 305/2011 (CPR), DoP No. 0016. Certificato IMQ-HAR No. CA01.00682 <i>EN 50525-2-21, Low Voltage European Directive No. 2014/35/EU, European Regulation 305/2011 (CPR), DoP No. 0016. IMQ-HAR certificate No. CA01.00682</i>
Conduttore <i>Stranding of conductor</i>	Conduttore flessibile in classe 5 in rame rosso elettrolitico, conforme alla norma IEC 60228 <i>Class 5 electrolytic bare copper flexible conductor conforming to IEC 60228 standard</i>
Isolamento <i>Insulation</i>	Gomma elastomerica EI4 conforme alla norma EN 50363-1 <i>EI4 elastomeric rubber complies with EN 50363-1 standard</i>
Riunitura <i>Cable assembly</i>	Le anime sono trecciate insieme ed avvolte con nastro separatore o talcate. Il riempitivo centrale in cotone filato è utilizzato solo per la costruzione a cinque conduttori. <i>The inner cores are twisted together and wrapped with tape or talcumized. The yarn cotton central filler is applied only for 5-core construction.</i>
Colore isolamento <i>Color of insulation</i>	In conformità con i requisiti della norma HD 308 <i>In compliance with requirements of standard HD 308</i>
Guaina esterna <i>Outer sheath</i>	Gomma elastomerica EM2 o elastomero sintetico equivalente conforme alla norma EN 50363-2-1 <i>EM2 elastomeric rubber or equivalent synthetic elastomer complies with EN 50363-2-1 standard</i>
Colore guaina <i>Color of sheath</i>	Nero. Altri colori sono disponibili su richiesta. <i>Black. Other colors are available on request.</i>
Marcatura a inchiostro bianco <i>White ink marking</i>	SALCAVI SPA - ITALY IEMMEQU-HAR H07RN-F - CPR CLASS Eca - SS/AA <i>SALCAVI SPA - ITALY IEMMEQU-HAR H07RN-F - CPR CLASS Eca - WW/YY</i>